

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

Version Information :

SN	Date	Version Code	Modify Description	Editor
01	2021.07.09	V3R8	New version update release	David Wang

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

REMINDERS

- ◆ Product information in this catalog is subject to change without notice, and is for reference only. Therefore, please contact GOTREND Technology to check for the latest information before practical application or usage of the products.
- ◆ This catalog contains only typical specifications, please contact GOTREND Technology for further details if you can not find special components or information you need in this catalogue. Please also approve our product specifications or transact the approval sheet for product specifications before ordering.
- ◆ This catalogue only applies to products purchased through GOTREND Technolgy or its official agencies. This catalogue does not apply to products that are purchased through other third parties.
- ◆ Please read Attention and CAUTION note (for storage, operating, rating, soldering, mounting and handling) in this catalog to ensure product proper usage.
- ◆ GOTREND Technology is not responsible for issues that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. GOTREND Technology do not grant license of these rights.
- ◆ Information and data provided in the brochure can and do vary in different applications, and actual performance may vary over time.
- ◆ "Delivery Specification" illustrating precautions for the specifications and safety of each product listed in this catalog is available and we strongly recommend to provide these delivery specifications with customers that use these products.
- ◆ For exporting of product in this catalog, please take note it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in accordance to this law.
- ◆ Any reproduction or extraction of the contents in this catalog is prohibited without prior permission from GOTREND Technology.
- ◆ Products listed in this catalog are intended for general electronic device usage under normal operation and use condition including telecommunication equipment, home appliances, sports equipment AV equipment, industrial machine, office equipment etc. Please take note that our products are not designed, intended or authorized for use in below mentioned applications unless explicitly agreed in writing between the parties to avoid product failure that could result in situation where personal injury or death could occur.

- (1) Aerospace/Aviation equipment
- (2) Atomic energy-related equipment
- (3) Disaster prevention/crime prevention equipment
- (4) Electric heating apparatus, burning equipment
- (5) Medical equipment
- (6) Military equipment
- (7) Power-generation control equipment
- (8) Public information-processing equipment
- (9) Safety equipment
- (10) Seabed equipment
- (11) Transportation control equipment
- (12) Transportation equipment (cars, electric trains, ships, etc.)
- (13) Other applications that are not considered general-purpose applications

- ◆ Our manufacturing sites fully compliance with requirement regarding the quality management system in the automotive industry under the IATF 16949 standard. GOTREND Technology respect individual agreements with reference to customer requirements and customer specific requirements (CSR). We will like to emphasize that only requirements mutually agreed upon will in implemented in our Quality Management System taking into consideration that IATF 16949 may appear to support the acceptance of unilateral requirements. We will only legally bind to this individually agreed upon agreement under the IATF 16949 standard.

- ◆ The product itself is a powder metallurgy product, so the structure is relatively fragile, and it should not be used for products that are easy to fall. In addition, when this product is assembled, it should avoid collision with the tool or mechanism shell.



- ◆ It is not recommended to use hot air gun for disassembling of this product. When using of hot air gun to repair other parts, please also take note that long time or high temperature exposure of this product will also damage the inductance device. If you need to use the hot air gun to disassemble the product, it is recommended to adjust the hot air gun temperature to 380 deg.C±5 deg.C. The blower head of the hot air gun should be perpendicular and at least 1cm away from the product. After heating the product to the tin material melting point, use tweezers to remove the product from the PCB.



Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

Features & Application :

- * High Frequency SRF up to 10GHz
- * Fit for 2.4GHz / 5GHz....etc. RF circuit
- * To help you go pass the CE/FCC standard.
- * Mobile Device / Handheld Device / LowProfile Device / Panel...



(Picture for reference only)

Part No. Example :

PN	:	GTC	1005	P	<input type="checkbox"/>	-	1N2	S
-----		-----	-----	---	---		-----	---
ID	:	1	2	3	4		5	6
1	:	GTC : GOTREND Series						
2	:	1005 : Diamension code- Length 1.0mm X Width 0.5mm						
3	:	P : Pb free < 1000ppm						
4	:	M = Marking						
5	:	1N2 : [L] Value - Inductance 1N2=1.2nH, 27N=27nH, R27=270nH						
6	:	S : Tolerance Code - S = +/- 0.3 nH, J = 5%, K = 10% , M = 20%						

Basic Information :

Made in	China
Pin Foot	SMD
Shielding	Yes
J-STD-020	MSL Level 1
RoHS	Compliant
REACH	Compliant
Halogen	Free

Operating & Storage Condition :

- * Operating Temp -40 ~ +125 deg.C (Including self - temperature rise)
- * Storage Temp 1. -10 ~ +45 deg.C , 50 ~ 60% RH (Product with taping)
2. -40 ~ +125 deg.C (On board)
- * Storage Life Time 12 MONTH (Less than 40 deg.C and 60% RH)

Attention & Caution :

- * Keep out of Splashing water or salt water
- * Avoid Toxic Gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)
- Vibrations or shocks which exceed the specified condition
- Dew condense
- Layout near the edge of PCB
- Over flexure after SMT mounting & PCBA




- * Pin foot or SMD pad solderability: Pb free type is best within 6 months after delivery
- * Humidity sensitive , IPC/JEDEC J-STD-020 MSL if over Level 1, recommend bake 30mins@150 degree before PCBA
- * Caution for human life relative applications : PLS contact & consult with GOTREND team in design stage.

Test Condition :

- * Equipment HP4284A , HP42841A - L , Q , DCR , IDC
HP8753D Network analyzer - SRF
- * Standard Atmosphere Conditions:
Ambient Temperature 20 ± 15 deg.C
Humidity RH 65 ± 20%
- * If there may be any doubt on the test result ,
Measurement shall be made within the following limits:
Ambient Temperature 25 ± 5 deg.C
Humidity RH 75 ± 10%

Recommend IR Reflow Curve : GTX-IR-FILE001

Lead Free Solder : A = 217 deg.C , B = 245+/-5 deg.C
Time : C = 40 ~ 60 Sec.

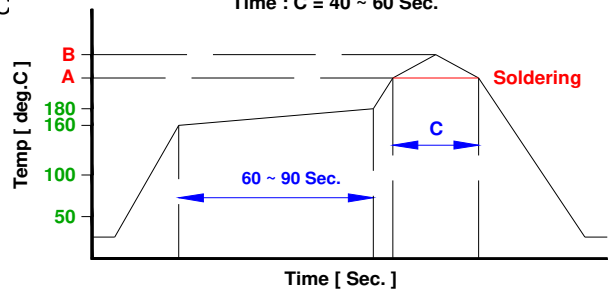


**Notice : Iron Soldering , Solder < 30 Watt ,
Direct touch the terminal x 3 Sec. Max. @ 350 deg.C**


Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GTC1005P-SERIES


Dimension [mm] :

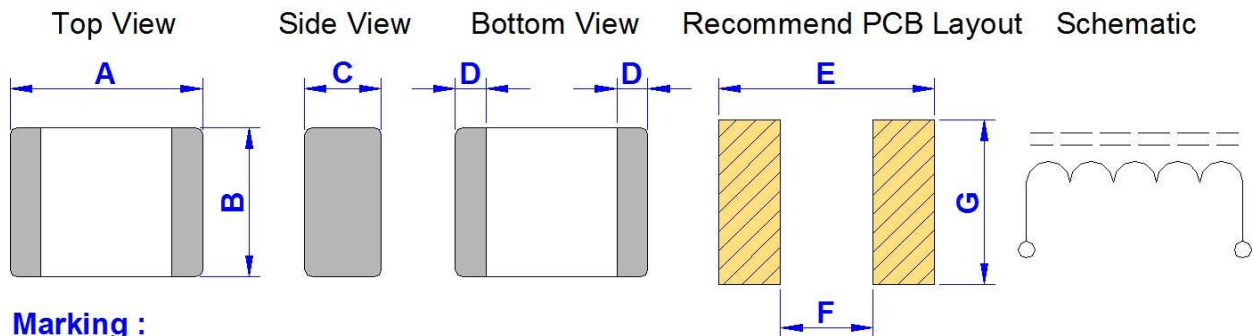

Marking :

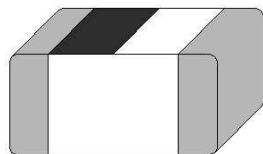

1005 / 1608 Size (Marking)

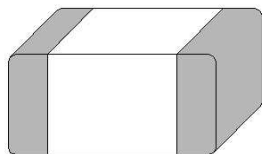

2012 Size (No Marking)

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
1005 [0402]	1.00+/-0.15	0.50+/-0.20	0.50+/-0.15	0.15+/-0.10	1.20-1.40	0.40	0.40

Electrical Characteristics :

Part No.	L - Value (nH) @100MHz 0.25V	Tolerance of L.value	Q @100MHz (Min.)	Q Typcial		S.R.F (MHz) Ref.	DCR (ohm) Max.	IDC (mA) Max.
				@100 MHz	@800 MHz			
GTC1005P□-1N0S	1.0	S	8	9	28	10000	0.10	300
GTC1005P□-1N2S	1.2	S	8	9	28	10000	0.10	300
GTC1005P□-1N5S	1.5	S	8	10	28	9000	0.10	300
GTC1005P□-1N8S	1.8	S	8	10	28	8700	0.12	300
GTC1005P□-2N0S	2.0	S	8	10	29	8100	0.15	300
GTC1005P□-2N2S	2.2	S	8	10	29	8100	0.15	300
GTC1005P□-2N4S	2.4	S	8	10	30	6000	0.13	300
GTC1005P□-2N7S	2.7	S	8	11	30	7700	0.15	300
GTC1005P□-3N0S	3.0	S	8	11	30	6300	0.15	300
GTC1005P□-3N3	3.3	S / K	8	11	30	6300	0.16	300
GTC1005P□-3N9	3.9	S / K	8	11	31	6100	0.21	300
GTC1005P□-4N3	4.3	S / K	8	11	31	5400	0.21	300
GTC1005P□-4N7	4.7	S / K	8	11	31	5400	0.21	300
GTC1005P□-5N1	5.1	S / K	8	10	30	5700	0.23	300
GTC1005P□-5N6	5.6	S / K	8	11	31	5100	0.23	300
GTC1005P□-6N8	6.8	J / K	8	11	31	4550	0.25	250
GTC1005P□-7N5	7.5	J / K	8	11	31	4300	0.25	250
GTC1005P□-8N2	8.2	J / K	8	12	31	4100	0.30	250
GTC1005P□-9N1	9.1	J / K	8	12	31	3900	0.35	250
GTC1005P□-10N	10.0	J / K	8	12	31	3900	0.35	250


* Inductance tolerance : S = ± 0.3 nH ; J = ± 5% ; K = ± 10%

* IDC based on increasing product temperature : Current when temperature of the product reaches +40 deg.C .

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GTC1005P-SERIES

Dimension [mm] :

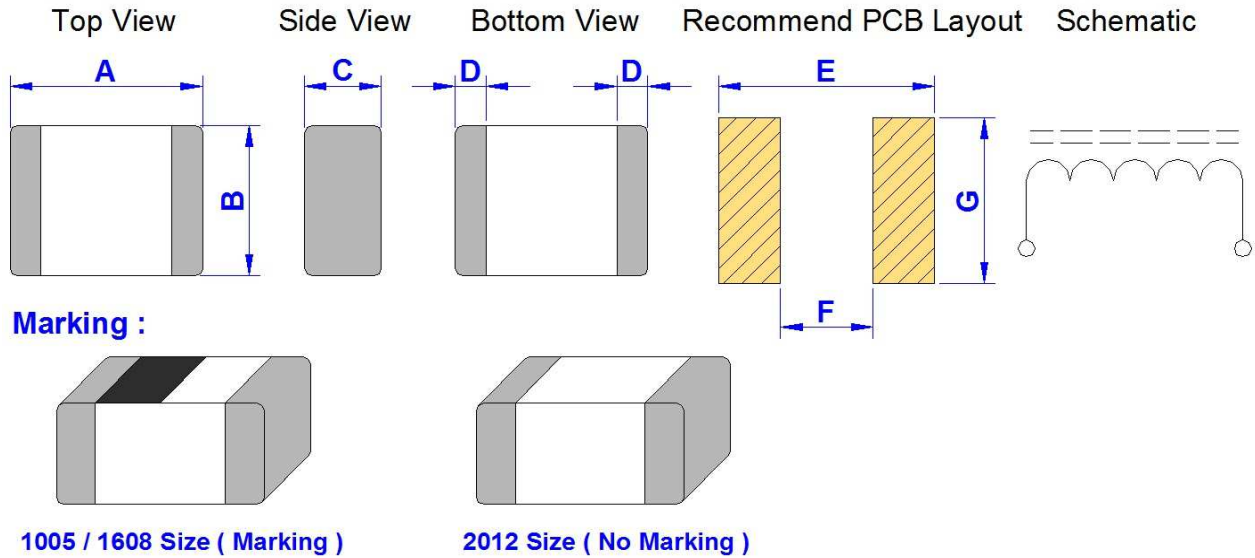

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
1005 [0402]	1.00+/-0.15	0.50+/-0.20	0.50+/-0.15	0.15+/-0.10	1.20-1.40	0.40	0.40

Electrical Characteristics :

Part No.	L - Value (nH) @100MHz 0.25V	Tolerance of L.value	Q @100MHz (Min.)	Q Typcial		S.R.F (MHz) Ref.	DCR (ohm) Max.	IDC (mA) Max.
				@100 MHz	@800 MHz			
GTC1005P□-12N	12.0	J / K	8	12	31	3000	0.40	250
GTC1005P□-15N	15.0	J / K	8	12	31	2600	0.50	250
GTC1005P□-18N	18.0	J / K	8	12	31	2350	0.55	200
GTC1005P□-22N	22.0	J / K	8	12	31	2000	0.70	200
GTC1005P□-27N	27.0	J / K	8	12	32	1900	0.80	200
GTC1005P□-33N	33.0	J / K	8	10	32	1700	1.00	200
GTC1005P□-39N	39.0	J / K	8	10	32	1600	1.20	150
GTC1005P□-47N	47.0	J / K	8	10	33	1300	1.30	150
GTC1005P□-56N	56.0	J / K	8	10	34	1250	2.00	150
GTC1005P□-68N	68.0	J / K	8	10	35	1000	2.20	100
GTC1005P□-82N	82.0	J / K	8	10	35	900	2.50	100
GTC1005P□-R10	100.0	J / K	8	10	35	850	2.50	100
GTC1005P□-R12	120.0	J / K	8	10	35	750	2.50	100
GTC1005P□-R18	180.0	J / K	8	10	35	550	3.80	100
GTC1005P□-R27	270.0	J / K	8	/	35	500	4.80	100


* Inductance tolerance : J = ± 5% ; K = ± 10%

* IDC based on increasing product temperature : Current when temperature of the product reaches +40 deg.C .

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GTC1608P-SERIES

Dimension [mm] :

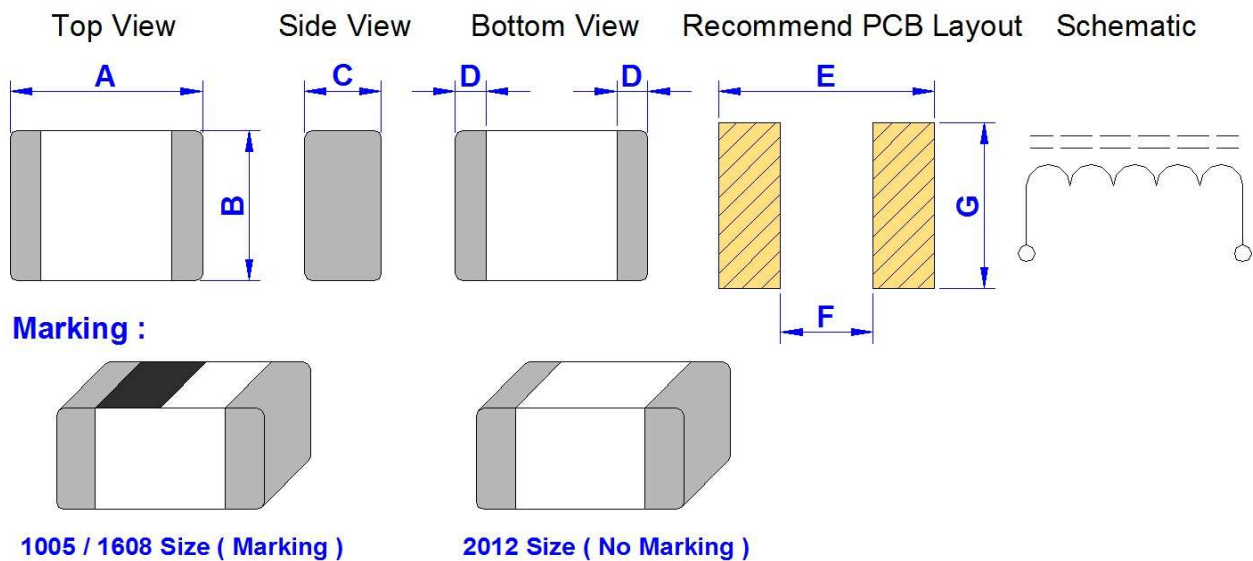

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
1608 [0603]	1.60+/-0.15	0.80+/-0.15	0.80+/-0.15	0.25+/-0.10	2.40-3.40	0.80	0.60

Electrical Characteristics :

Part No.	L - Value (nH) @100MHz 0.25V	Tolerance of L.value	Q @100MHz (Min.)	Q Typcial		S.R.F (MHz) Ref.	DCR (ohm) Max.	IDC (mA) Max.
				@100 MHz	@800 MHz			
GTC1608P□-1N0S	1.0	S	8	12	50	>17000	0.10	300
GTC1608P□-1N2S	1.2	S	8	13	65	>17000	0.10	300
GTC1608P□-1N5S	1.5	S	8	13	55	>17000	0.10	300
GTC1608P□-1N7S	1.7	S	8	13	51	8000	0.10	300
GTC1608P□-1N8S	1.8	S	8	13	51	6000	0.10	300
GTC1608P□-2N2S	2.2	S	8	13	45	6000	0.10	300
GTC1608P□-2N7S	2.7	S	8	13	45	8600	0.10	300
GTC1608P□-3N3	3.3	S / K	8	13	51	6500	0.12	300
GTC1608P□-3N9	3.9	S / K	8	13	52	6300	0.14	300
GTC1608P□-4N7	4.7	S / K	8	13	41	5400	0.16	300
GTC1608P□-5N6	5.6	S / K	8	13	41	4600	0.18	300
GTC1608P□-6N8	6.8	J / K	8	13	44	4500	0.22	300
GTC1608P□-8N2	8.2	J / K	8	13	44	3800	0.24	300
GTC1608P□-10N	10.0	J / K	8	13	45	3700	0.26	300
GTC1608P□-12N	12.0	J / K	8	15	46	3200	0.28	300
GTC1608P□-15N	15.0	J / K	8	15	48	2900	0.32	300
GTC1608P□-18N	18.0	J / K	10	15	48	2100	0.35	300
GTC1608P□-22N	22.0	J / K	10	17	45	2100	0.40	300
GTC1608P□-27N	27.0	J / K	10	17	43	2000	0.45	300
GTC1608P□-33N	33.0	J / K	10	18	39	1600	0.55	300


* Inductance tolerance : S = ± 3% ; J = ± 5% ; K = ± 10%

* IDC based on increasing product temperature : Current when temperature of the product reaches +40 deg.C .


Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GTC1608P-SERIES


Dimension [mm] :

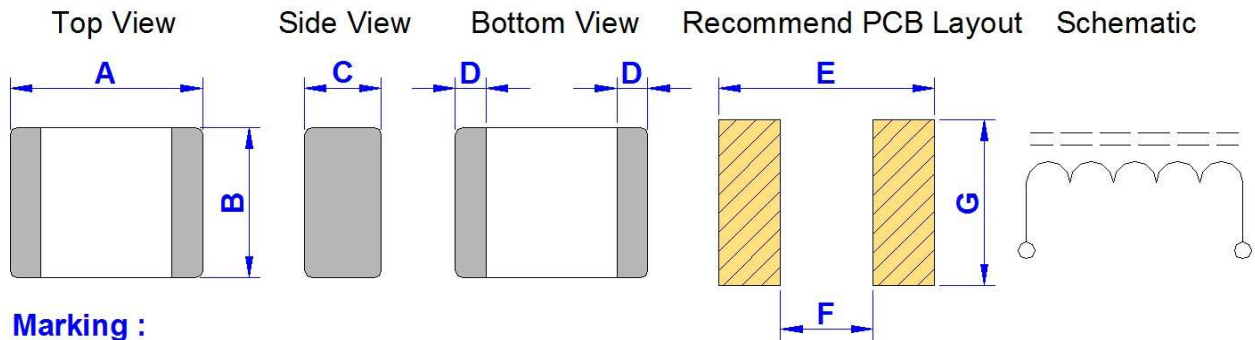

Marking :

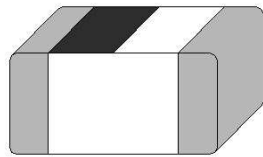

1005 / 1608 Size (Marking)

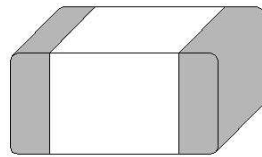

2012 Size (No Marking)

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
1608 [0603]	1.60+/-0.15	0.80+/-0.15	0.80+/-0.15	0.25+/-0.10	2.40-3.40	0.80	0.60

Electrical Characteristics :

Part No.	L - Value (nH) @100MHz 0.25V	Tolerance of L.value	Q @100MHz (Min.)	Q Typcial		S.R.F (MHz) Ref.	DCR (ohm) Max.	IDC (mA) Max.
				@100 MHz	@800 MHz			
GTC1608P□-39N	39.0	J / K	10	18	37	1500	0.60	300
GTC1608P□-47N	47.0	J / K	12	18	35	1200	0.70	300
GTC1608P□-56N	56.0	J / K	12	18	32	1100	0.75	300
GTC1608P□-62N	62.0	J / K	12	18	32	1050	0.85	300
GTC1608P□-68N	68.0	J / K	12	18	32	1050	0.85	300
GTC1608P□-82N	82.0	J / K	12	18	32	850	1.00	300
GTC1608P□-R10	100.0	J / K	12	18	20	750	1.20	300
GTC1608P□-R12	120.0	J / K	8 @50MHz	16	23	700	2.30	300
GTC1608P□-R15	150.0	J / K	8 @50MHz	14	23	650	2.40	300
GTC1608P□-R18	180.0	J / K	8 @50MHz	14	21	550	2.70	300
GTC1608P□-R22	220.0	J / K	8 @50MHz	13	20	450	3.00	250


* Inductance tolerance : J = ± 5% ; K = ± 10%

* IDC based on increasing product temperature : Current when temperature of the product reaches +40 deg.C .


Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GTC2012P-SERIES


Dimension [mm] :

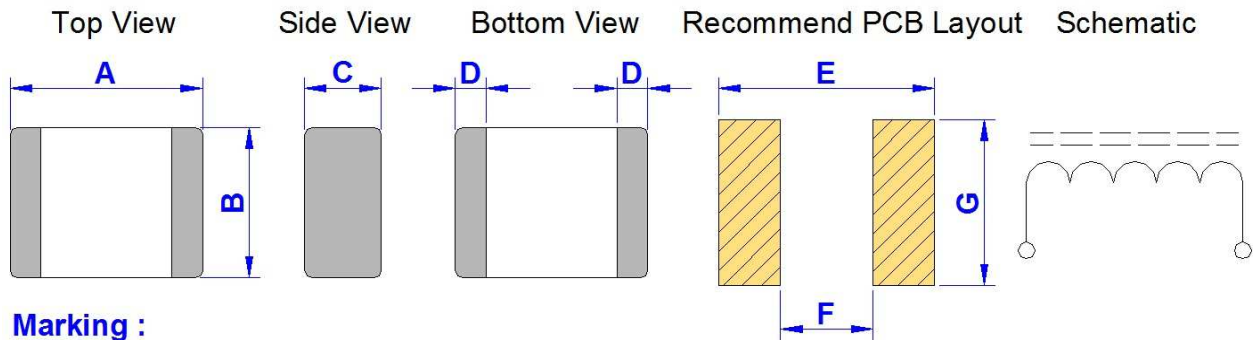

Marking :

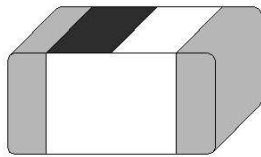

1005 / 1608 Size (Marking)

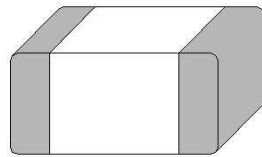

2012 Size (No Marking)

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
2012 [0805]	2.00+/-0.20	1.20+/-0.20	0.90+/-0.20	0.30+/-0.15	3.00-4.00	1.20	1.00

Electrical Characteristics :

Part No.	L - Value (nH) @100MHz 0.25V	Tolerance of L.value	Q @100MHz (Min.)	Q Typcial		S.R.F (MHz) Ref.	DCR (ohm) Max.	IDC (mA) Max.
				@100 MHz	@800 MHz			
GTC2012P-1N0S	1.0	S	10	12	38	>6000	0.10	300
GTC2012P-1N2S	1.2	S	10	12	38	>6000	0.10	300
GTC2012P-1N5S	1.5	S	10	13	40	>6000	0.10	300
GTC2012P-1N8S	1.8	S	10	13	45	>6000	0.10	300
GTC2012P-2N2S	2.2	S	10	13	48	>6000	0.10	300
GTC2012P-2N7S	2.7	S	12	13	40	>6000	0.12	300
GTC2012P-3N3	3.3	S / K	12	15	56	>6000	0.13	300
GTC2012P-3N9	3.9	S / K	12	15	54	5600	0.15	300
GTC2012P-4N7	4.7	S / K	12	15	50	5500	0.20	300
GTC2012P-5N6	5.6	S / K	12	15	53	4700	0.23	300
GTC2012P-6N8	6.8	J / K	15	15	51	3900	0.25	300
GTC2012P-8N2	8.2	J / K	15	15	53	3200	0.28	300
GTC2012P-10N	10.0	J / K	15	16	45	3100	0.30	300
GTC2012P-12N	12.0	J / K	15	16	48	2800	0.35	300
GTC2012P-15N	15.0	J / K	15	17	48	2400	0.40	300
GTC2012P-18N	18.0	J / K	15	17	43	2100	0.45	300
GTC2012P-22N	22.0	J / K	15	17	47	2000	0.50	300
GTC2012P-27N	27.0	J / K	15	18	38	1800	0.55	300
GTC2012P-33N	33.0	J / K	15	19	35	1700	0.60	300
GTC2012P-39N	39.0	J / K	18	21	40	1400	0.65	300


* Inductance tolerance : S = ± 3% ; J = ± 5% ; K = ± 10%

* IDC based on increasing product temperature : Current when temperature of the product reaches +40 deg.C .


Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GTC2012P-SERIES


Dimension [mm] :

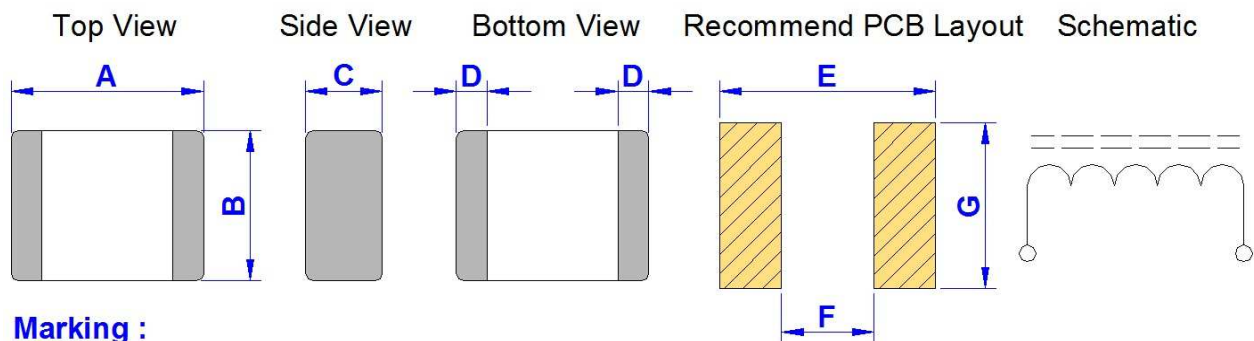

Marking :

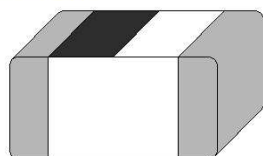

1005 / 1608 Size (Marking)

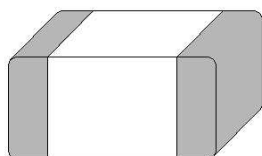

2012 Size (No Marking)

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
2012 [0805]	2.00+/-0.20	1.20+/-0.20	0.90+/-0.20	0.30+/-0.15	3.00-4.00	1.20	1.00

Electrical Characteristics :

Part No.	L - Value (nH) @100MHz 0.25V	Tolerance of L.value	Q @100MHz (Min.)	Q Typcial		S.R.F (MHz) Ref.	DCR (ohm) Max.	IDC (mA) Max.
				@100 MHz	@800 MHz			
GTC2012P-47N	47.0	J / K	18	21	38	1200	0.70	300
GTC2012P-56N	56.0	J / K	18	21	31	1000	0.75	300
GTC2012P-68N	68.0	J / K	18	21	28	900	0.80	300
GTC2012P-82N	82.0	J / K	18	22	25	900	0.85	300
GTC2012P-R10	100.0	J / K	18	23	25	700	0.90	300
GTC2012P-R12	120.0	J / K	13@50MHz	22	25	600	0.95	300
GTC2012P-R15	150.0	J / K	13@50MHz	22	24	500	1.00	300
GTC2012P-R18	180.0	J / K	13@50MHz	23	23	430	1.10	300
GTC2012P-R22	220.0	J / K	12@50MHz	20	22	400	1.20	300
GTC2012P-R27	270.0	J / K	12@50MHz	20	22	340	1.30	300
GTC2012P-R33	330.0	J / K	12@50MHz	22	20	320	1.50	300
GTC2012P-R39	390.0	J / K	10@50MHz	17	20	270	1.60	300
GTC2012P-R47	470.0	J / K	10@50MHz	17	20	250	1.80	300
GTC2012P-R56	560.0	J / K	10@50MHz	17	20	230	2.50	300
GTC2012P-R68	680.0	J / K	10@50MHz	17	20	180	3.00	300

* Inductance tolerance : J = ± 5% ; K = ± 10%

* IDC based on increasing product temperature : Current when temperature of the product reaches +40 deg.C .

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

Care note :

Care note for Use :

(1) Storage Condition :

Temperature 25 to 35 deg.C , Humidity 45 to 60% RH

(2) Use Temperature :

- a. Minimum Temperature : -40 deg.C Ambient temperature of this product.
- b. Maximum Temperature : +125 deg.C The value of temperature including ambient and temperature rise of this product.
- c. Reliability test temperature range from -40 ~ +125 deg.C
- d. However, this is not meant as temperature grade guarantee for UL.

(3) Model :

When this product was used in a similar or as new product to the original one, sometimes it might be unable to satisfy the specifications due to difference in condition of usage.

(4) Drop :

If this product suffered mechanical stress such as drop, characteristics may become poor (due to damage on coil / bobbin / ferrite ... etc.)
Never use such stressed product.

Care note for Safety :

(1) Provision to Abnormal Condition :

This product itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc.
Therefore, it shall be confirmed from the end product that there is no risk of smoking, fire, dielectric withstand voltage insulation resistance,etc. in abnormal conditions to provide protective devices and /or protection circuit in the end product.

(2) Temperature Rise :

Temperature rise on this product depends on the installation condition on end products.
It shall be confirmed on the actual end product that temperature rise of this product is within the specified temperature class limit.

(3) Dielectric Strength :

Dielectric withstanding test with higher voltage than specific value will damage insulating material and shorten its life.

(4) Water :

This product must not be used in wet condition resulted from water, coffee or any liquid contact because insulation strength becomes very low under such condition.

(5) Potting :




If this product is potted in some compound, coating material of magnet wire might be occasionally damaged. Please ask us if you intend to pot this product.

(6) Detergent :

Please consult our company immediately once under such circumstances because product reliability confirmation etc. is needed when this product come in contact with these chemicals.

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize


Reliability :

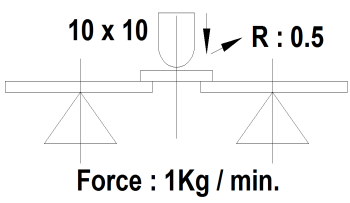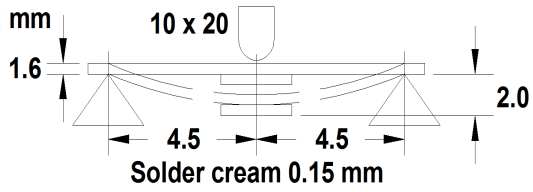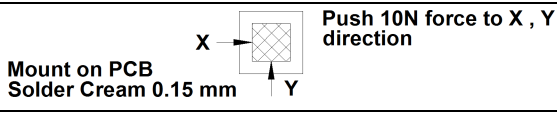SN	Test Item	Test Condition	Specification		
1	Dimension	Actual Size ...	Meet Spec		
2	Thermal Shock (Temperature Cycle)	Temperature : -40 ~ +125 deg.C kept stabilized for 30 min. each Cycle : 100 Cycles (power off)	Elec. no variation Appearance no deformation		
3	Humidity Resistance	Humidity : 90% ~ 95% RH Temperature : 60 ± 2 deg.C · Test Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation		
4	High Temperature	Temperature : 125 ± 2 deg.C Testing Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation		
5	Low Temperature	Temperature : -40 ± 2 deg.C Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation		
6	Temperature and Humidity Cycle	Temperature	Humidity	Time	Elec. no variation Appearance no deformation
		25 deg.C	90% ~ 95% RH	3.0 Hr	
		55 deg.C	95% ~ 96% RH	5.0 Hr	
		25 deg.C	90% ~ 95% RH	3.0 Hr	
		Cycle : 20 Cycles			
7	Vibration	Frequency : 10Hz ~ 55Hz · Amplitude : 1.5 mm Direction : X · Y · Z · Time : 2 Hours each	Elec. no variation Appearance no deformation		
8	Solderability	Go through real SMT IR-Reflow The profile like our suggest profile. Preheat : 160 ± 10 deg.C (90 sec) Peak : 245 ± 5 deg.C Peak Time : 50 Sec. / up 217 deg.C	Elec. no variation Appearance no deformation		
9	Soldering Heat Resistance	Preheat : 160 ± 10 deg.C (90 sec) Solder : Sn / Ag / Cu (Pb Free) Solder Temp. : 260 ± 5 deg.C · Time : 3 ± 1 seconds	Elec. no variation Appearance no deformation		
10	Iron Solder Heat Resistance	Solder Temp. : 350 ± 5 deg.C Flux : Rosin · Time : 3 ± 1 seconds	Elec. no variation Appearance no deformation		
11	Bending Strength	Unit : mm  Force : 1Kg / min.	Elec. no variation Appearance no deformation		
12	Flexure Strength	Unit : mm  Solder cream 0.15 mm	Elec. no variation Appearance no deformation		
13	Terminal Strength	 Mount on PCB Solder Cream 0.15 mm Push 10N force to X , Y direction	Elec. no variation Appearance no deformation		
14	High-Voltage	100 V DC between core & winding	Elec. no variation Appearance no deformation		
15	Load life	Temperature : 25 ± 3 deg.C Load : Allowed DC Current · Test Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation		

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize


Packaging Information :

Tape Dimension (mm) :

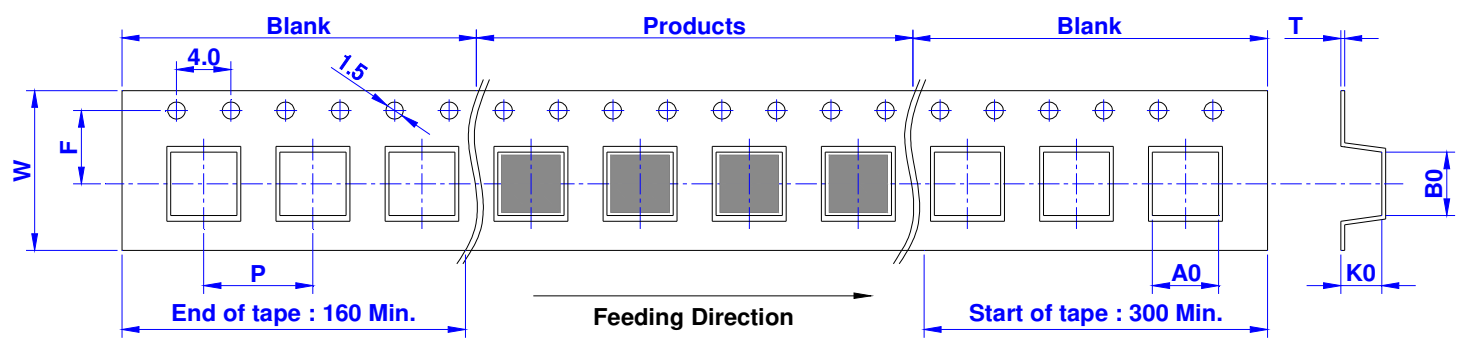


SIZE/mm	W	P	A0	B0	K0	T	F
1005	8.00	2.00	0.60	1.15	0.70	0.35	3.50
1608	8.00	4.00	1.00	1.90	1.05	0.35	3.50
2012	8.00	4.00	1.60	2.25	1.15	0.35	3.50

Reel Dimension (mm) :

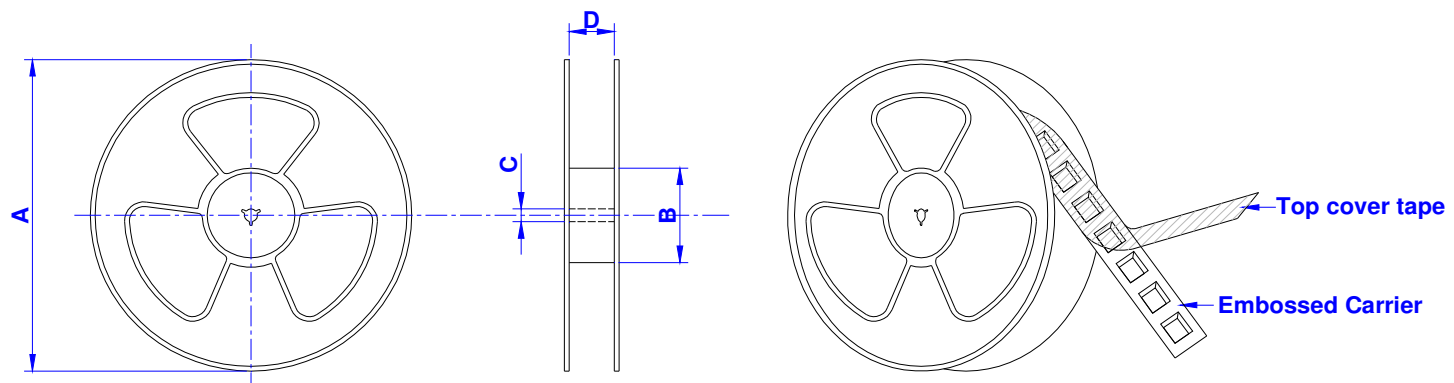

SIZE/mm	Reel Size	A	B	C	D	QTY / Reel
1005	7" x 8 mm	178	60	13	8.5	10000 PCS
1608	7" x 8 mm	178	60	13	8.5	4000 PCS
2012	7" x 8 mm	178	60	13	8.5	4000 PCS

Tearing Off Force :

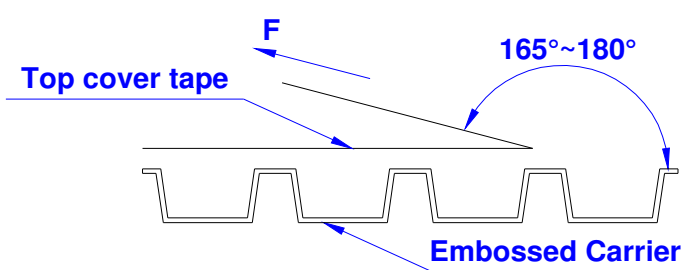


The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions (referenced ANSI / EIA - 481 - D - 2008 of 4.11 stadnard).

Room Temp. (deg.C)	Room Humidity (%)	Room Atm. (hPa)	Tearing Speed (mm / min)
5 ~ 35	45 ~ 85	860 ~ 1060	300

Product Series : GTC	Brand : GOTREND
File Version : GTC-SERIES-V3R8	Editor : David Wang
Established Date : 2009.05.22	Description : Multilayer Ceramic High-Frequency Inductor
Latest Edit Date : 2021.07.09	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

Packaging Information :

Box Package :

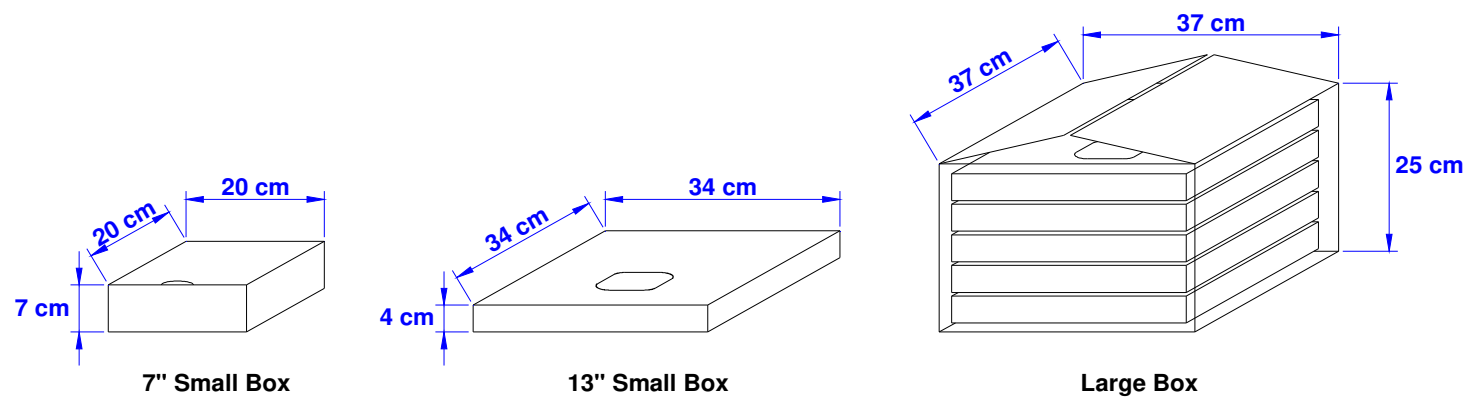

SIZE/mm	Reels in Small Box	Small Box in Large Box
1005	5	8
1608	5	8
2012	5	8