


Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize


REMINDERS

- ◆ Product information in this catalog is subject to change without notice, and is for reference only. Therefore, please contact GOTREND Technology to check for the latest information before practical application or usage of the products.
- ◆ This catalog contains only typical specifications, please contact GOTREND Technology for further details if you can not find special components or information you need in this catalogue. Please also approve our product specifications or transact the approval sheet for product specifications before ordering.
- ◆ This catalogue only applies to products purchased through GOTREND Technolgy or its official agencies. This catalogue does not apply to products that are purchased through other third parties.
- ◆ Please read Attention and CAUTION note (for storage, operating, rating, soldering, mounting and handling) in this catalog to ensure product proper usage.
- ◆ GOTREND Technology is not responsible for issues that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. GOTREND Technology do not grant license of these rights.
- ◆ Information and data provided in the brochure can and do vary in different applications, and actual performance may vary over time.
- ◆ "Delivery Specification" illustrating precautions for the specifications and safety of each product listed in this catalog is available and we strongly recommend to provide these delivery specifications with customers that use these products.
- ◆ For exporting of product in this catalog, please take note it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in accordance to this law.
- ◆ Any reproduction or extraction of the contents in this catalog is prohibited without prior permission from GOTREND Technology.
- ◆ Products listed in this catalog are intended for general electronic device usage under normal operation and use condition including telecommunication equipment, home appliances, sports equipment AV equipment, industrial machine, office equipment etc. Please take note that our products are not designed, intended or authorized for use in below mentioned applications unless explicitly agreed in writing between the parties to avoid product failure that could result in situation where personal injury or death could occur.

- (1) Aerospace/Aviation equipment
- (2) Atomic energy-related equipment
- (3) Disaster prevention/crime prevention equipment
- (4) Electric heating apparatus, burning equipment
- (5) Medical equipment
- (6) Military equipment
- (7) Power-generation control equipment
- (8) Public information-processing equipment
- (9) Safety equipment
- (10) Seabed equipment
- (11) Transportation control equipment
- (12) Transportation equipment (cars, electric trains, ships, etc.)
- (13) Other applications that are not considered general-purpose applications

- ◆ Our manufacturing sites fully compliance with requirement regarding the quality management system in the automotive industry under the IATF 16949 standard. GOTREND Technology respect individual agreements with reference to customer requirements and customer specific requirements (CSR). We will like to emphasize that only requirements mutually agreed upon will in implemented in our Quality Management System taking into consideration that IATF 16949 may appear to support the acceptance of unilateral requirements. We will only legally bind to this individually agreed upon agreement under the IATF 16949 standard.


- ◆ The product itself is a powder metallurgy product, so the structure is relatively fragile, and it should not be used for products that are easy to fall. In addition, when this product is assembled, it should avoid collision with the tool or mechanism shell. 

- ◆ It is not recommended to use hot air gun for disassembling of this product. When using of hot air gun to repair other parts, please also take note that long time or high temperature exposure of this product will also damage the inductance device. If you need to use the hot air gun to disassemble the product, it is recommended to adjust the hot air gun temperature to 380 deg.C±5 deg.C. The blower head of the hot air gun should be perpendicular and at least 1cm away from the product. After heating the product to the tin material melting point, use tweezers to remove the product from the PCB. 

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

Features & Application :

- * Bead inductor for power energy storage or noise suppressor.
- * Fit for power line & signal line circuit .
- * To help you go pass the CE/FCC standard.
- * Mobil Device / Handheld Device / LowProfile Device / Panel...

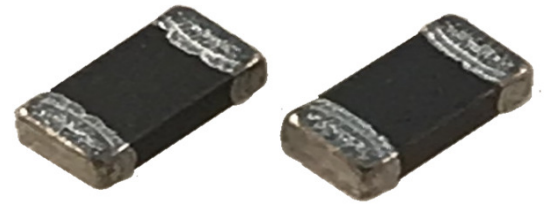

(Picture for reference only)

Part No. Example :

PN	:	GBLH	160808	P	<input type="checkbox"/>	-	4R7	M
ID	:	1	2	3	4		5	6
1	:	GOTREND BRAND & PRODUCT TYPE						
2	:	Dimension - L 1.6 mm X W 0.8 mm X T 0.8 mm						
3	:	Pb free < 1000ppm						
4	:	[A] [L] [Y] : Material Code						
5	:	[L] Value : Inductance 4R7 = 4.7 uH						
6	:	Tolerance Code - M = 20%						

Basic Information :

Made in	China
Pin Foot	SMD
Shielding	Yes
J-STD-020	MSL Level 1
RoHS	Compliant
REACH	Compliant
Halogen	Free

Operating & Storage Condition :

- * Operating Temp -40 ~ +125 deg.C (Including self - temperature rise)
- * Storage Temp 1. -10 ~ +45 deg.C , 50 ~ 60% RH (Product with taping)
2. -40 ~ +125 deg.C (On board)
- * Storage Life Time 6 Month (Less than 40 deg.C and 60% RH)

Attention & Caution :

- * Keep out of Splashing water or salt water
- * Avoid Toxic Gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)
- * Avoid Vibrations or shocks which exceed the specified condition
- * Avoid Dew condense
- * Avoid Layout near the edge of PCB
- * Avoid Over flexure after SMT mounting & PCBA
- * Pin foot or SMD pad solderability: Pb free type is best within 6 months after delivery
- * Humidity sensitive , IPC/JEDEC J-STD-020 MSL if over Level 1, recommend bake 30mins@150 degree before PCBA
- * Caution for human life relative applications : PLS contact & consult with GOTREND team in design stage.




Test Condition :

- * Equipment HP4284A , HP42841A - L , Q , DCR , IDC
HP8753D Network analyzer - SRF
- * Standard Atmosphere Conditions:
Ambient Temperature 20 ± 15 deg.C
Humidity RH 65 ± 20%
- * If there may be any doubt on the test result ,
Measurement shall be made within the following limits:
Ambient Temperature 25 ± 5 deg.C
Humidity RH 75 ± 10%

Recommend IR Reflow Curve : GTX-IR-FILE001

Lead Free Solder : A = 217 deg.C , B = 245+/-5 deg.C
Time : C = 40 ~ 60 Sec.

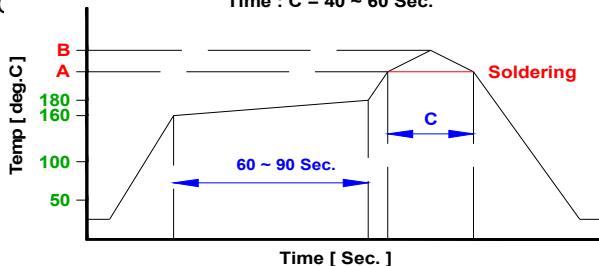


Notice : Iron Soldering , Solder < 30 Watt ,
Direct touch the terminal x 3 Sec. Max. @ 350 deg.C

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GBLH160808P□-SERIES

Dimension [mm] :

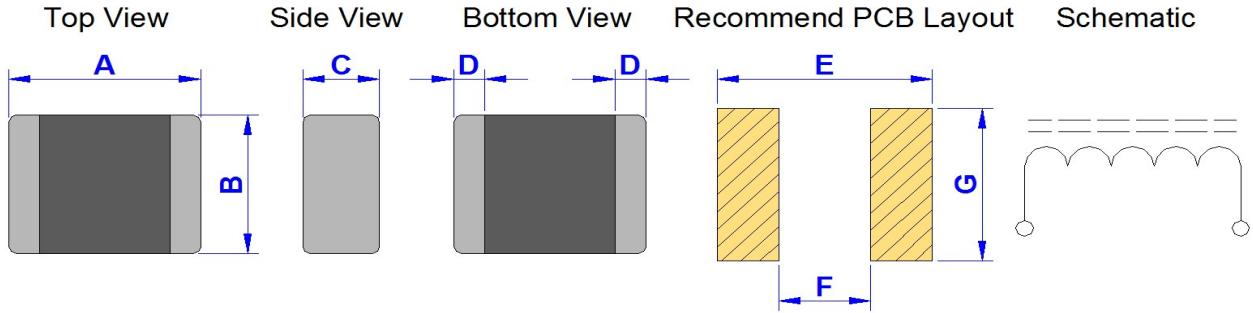

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
160808	1.60+/-0.20	0.80+/-0.20	0.80+/-0.20	0.30+/-0.20	2.00	0.90	1.00

Electrical Characteristics :

Part No.	Inductance (uH)	SRF (MHz) Min.	DCR (Ω)	Rated Current (mA) Max.
GBLH160808P-R22M	0.22+/-20%	150	0.8 Max.	50
GBLH160808P-4R7M	4.70+/-20%	35	2.10 Max.	110
GBLH160808P-100M	10.00+/-20%	17	1.85 Max.	60
GBLH160808PA-1R0M	1.00+/-20%	---	0.12 Max.	1500
GBLH160808PA-2R2M	2.20+/-20%	---	0.20 Max.	1000
GBLH160808PA-4R7M	4.70+/-20%	---	0.25 Max.	800
GBLH160808PY-2R2M	2.20+/-20%	---	0.30 Max.	650

■ Inductance test freq. : @ 1MHz / 250mV


■ The maximum rated current : The DC current value having temperature increased 40 deg.C after thru DC current 2 hours at ambient temperature.

■ Regarding to the inductance variability of rated current , please refer to Inductance Vs. DC superposition characteristics.

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GBLH201206P-SERIES

Dimension [mm] :

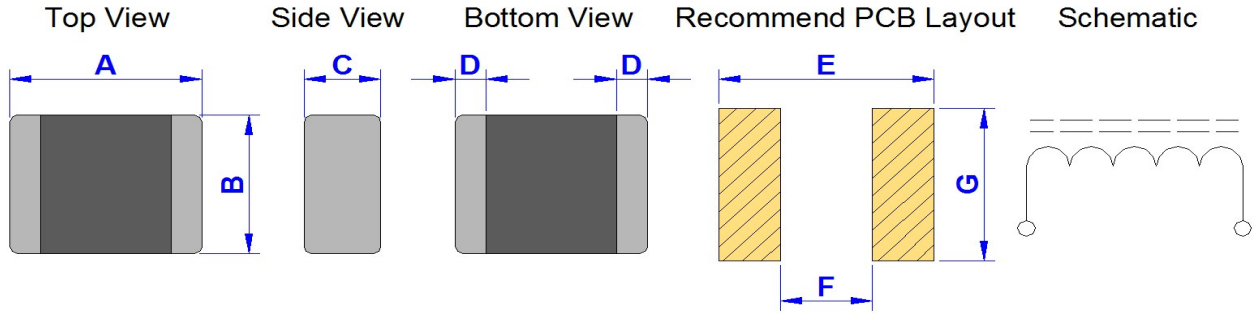

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
201206	2.00+/-0.20	1.25+/-0.20	0.60 max.	0.50+/-0.20	2.40	0.80	1.45

Electrical Characteristics :


Part No.	Inductance (uH)	SRF (MHz) Min.	DCR (Ω)	Rated Current (mA) Max.
GBLH201206P-4R7M	4.70+/-20%	---	0.55+/-30%	300

- Inductance test freq. : @ 1MHz / 250mV
- The maximum rated current : The DC current value having temperature increased 40 deg.C after thru DC current 2 hours at ambient temperature.
- Regarding to the inductance variability of rated current , please refer to Inductance Vs. DC superposition characteristics.

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GBLH201209P□-SERIES

Dimension [mm] :

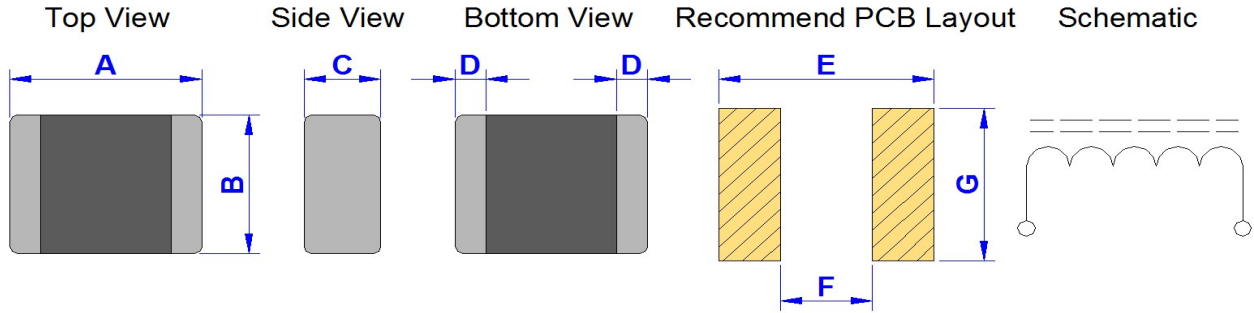

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
201209	2.00+/-0.20	1.25+/-0.20	0.90+/-0.10	0.50+/-0.20	2.40	0.80	1.45

Electrical Characteristics :

Part No.	Inductance (uH)	SRF (MHz) Min.	DCR (Ω)	Rated Current (mA) Max.
GBLH201209P-R47M	0.47+/-20%	100	0.10+/-25%	1100
GBLH201209P-1R0M	1.00+/-20%	90	0.16+/-25%	800
GBLH201209P-1R5M	1.50+/-20%	70	0.22+/-25%	700
GBLH201209P-2R2M	2.20+/-20%	50	0.25+/-25%	600
GBLH201209P-3R3M	3.30+/-20%	40	0.22+/-25%	500
GBLH201209P-4R7M	4.70+/-20%	30	0.30+/-25%	400
GBLH201209PA-1R0M	1.00+/-20%	---	0.06 Max.	2200
GBLH201209PA-2R2M	2.20+/-20%	---	0.10 Max.	2000
GBLH201209PA-3R3M	3.30+/-20%	---	0.12 Max.	1500
GBLH201209PA-4R7M	4.70+/-20%	---	0.30 Max.	900
GBLH201209PL-1R0M	1.00+/-20%	90	0.11+/-20%	1200
GBLH201209PL-2R2M	2.20+/-20%	50	0.25+/-25%	800
GBLH201209PL-3R3M	3.30+/-20%	40	0.19+/-25%	900
GBLH201209PL-4R7M	4.70+/-20%	30	0.25+/-25%	800

■ Inductance test freq. : @ 1MHz / 250mV


■ The maximum rated current : The DC current value having temperature increased 40 deg.C after thru DC current 2 hours at ambient temperature.

■ Regarding to the inductance variability of rated current , please refer to Inductance Vs. DC superposition characteristics.

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GBLH201609P-SERIES

Dimension [mm] :

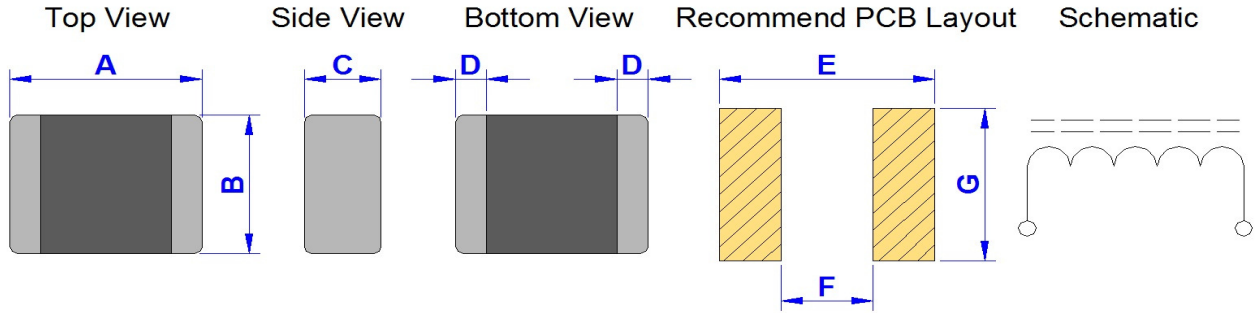

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
201609	2.00+/-0.15	1.60+/-0.15	0.90+/-0.10	0.50+/-0.20	2.40	0.80	1.80

Electrical Characteristics :

Part No.	Inductance (uH)	SRF (MHz) Min.	DCR (Ω)	Rated Current (mA) Max.
GBLH201609P-R68M	0.68+/-20%	90	0.15+/-30%	1500
GBLH201609P-R82M	0.82+/-20%	80	0.16+/-30%	1500
GBLH201609P-1R0M	1.00+/-20%	60	0.077~0.143	1700
GBLH201609P-1R2M	1.20+/-20%	60	0.077~0.143	1700
GBLH201609P-1R5M	1.50+/-20%	50	0.098~0.182	1500
GBLH201609P-1R8M	1.80+/-20%	50	0.098~0.182	1500
GBLH201609P-2R2M	2.20+/-20%	40	0.126~0.234	1300
GBLH201609P-2R7M	2.70+/-20%	40	0.126~0.234	1300
GBLH201609P-3R3M	3.30+/-20%	30	0.161~0.299	1100
GBLH201609P-3R9M	3.90+/-20%	30	0.161~0.299	1100
GBLH201609P-4R7M	4.70+/-20%	30	0.161~0.299	900

■ Inductance test freq. : @ 1MHz / 250mV


■ The maximum rated current : The DC current value having temperature increased 40 deg.C after thru DC current 2 hours at ambient temperature.

■ Regarding to the inductance variability of rated current , please refer to Inductance Vs. DC superposition characteristics.

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

GBLH252010P-SERIES

Dimension [mm] :

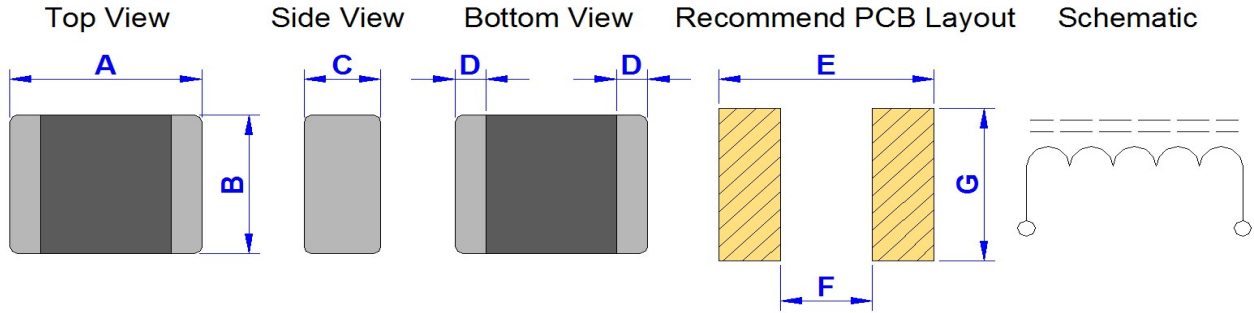

Size	A	B	C	D	E(Ref.)	F(Ref.)	G(Ref.)
252010	2.50+/-0.20	2.00+/-0.20	0.90+/-0.10	0.60+/-0.20	2.90	1.10	2.20

Electrical Characteristics :

Part No.	Inductance (uH)	SRF (MHz) Min.	DCR (Ω)	Rated Current (mA) Max.
GBLH252010P-R47M	0.47+/-20%	100	0.07+/-25%	1800
GBLH252010P-1R0M	1.00+/-20%	60	0.11+/-25%	1600
GBLH252010P-1R5M	1.50+/-20%	50	0.13+/-25%	1500
GBLH252010P-2R2M	2.20+/-20%	40	0.16+/-25%	1300
GBLH252010P-3R3M	3.30+/-20%	30	0.17+/-25%	1200
GBLH252010P-4R7M	4.70+/-20%	25	0.20+/-25%	1100


- Inductance test freq. : @ 1MHz / 250mV
- The maximum rated current : The DC current value having temperature increased 40 deg.C after thru DC current 2 hours at ambient temperature.
- Regarding to the inductance variability of rated current , please refer to Inductance Vs. DC superposition characteristics.

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize


GBLH252010P-SERIES

Curve :

Inductance vs Frequency

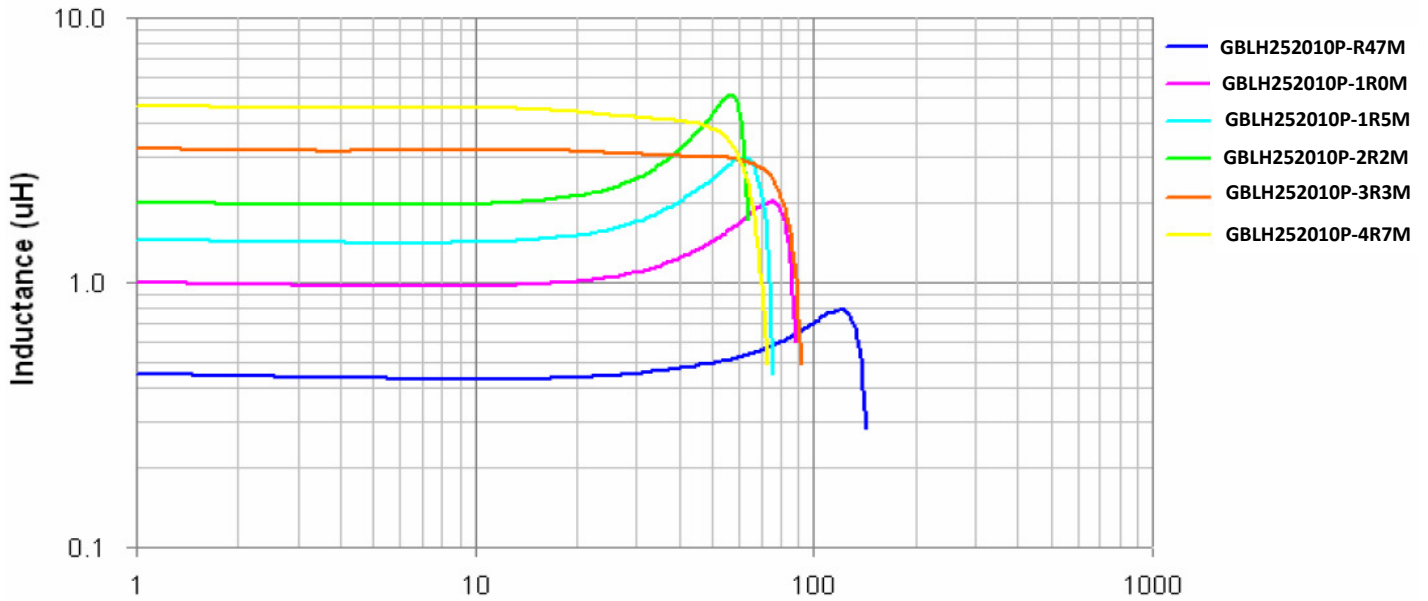

Inductance VS DC bias current

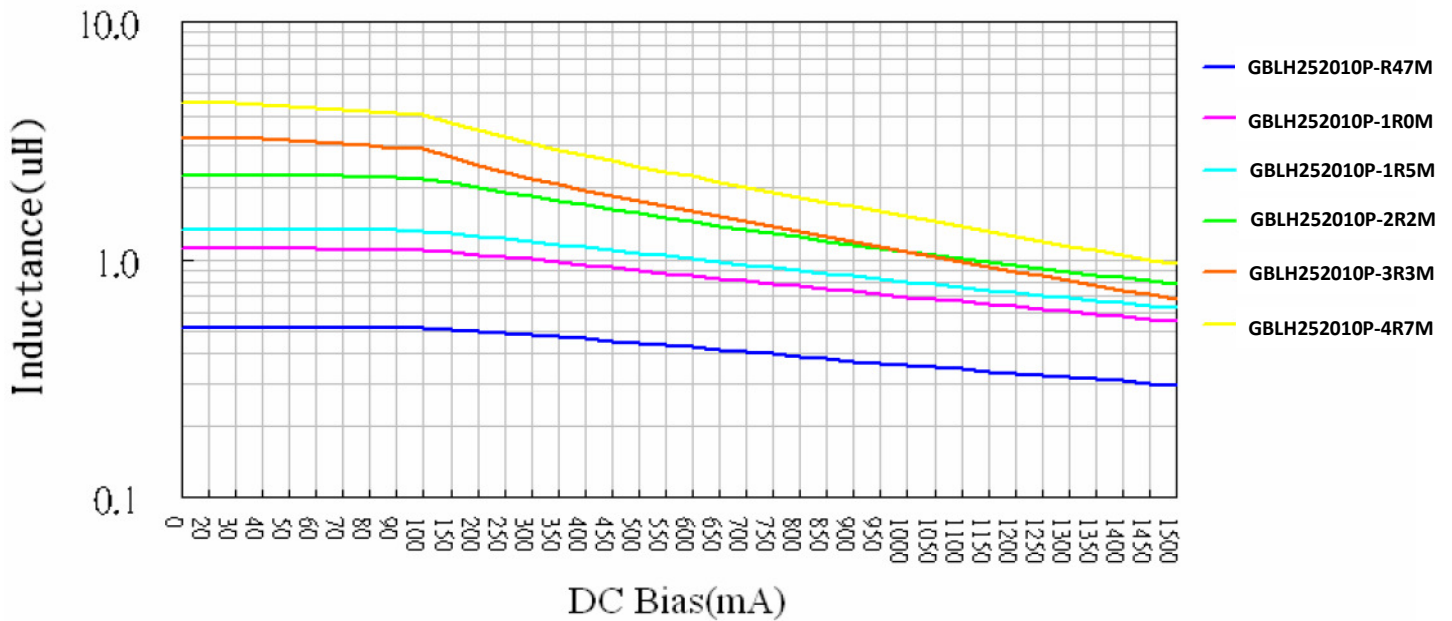

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

Care note :

Care note for Use :

(1) Storage Condition :

Temperature 25 to 35 deg.C , Humidity 45 to 60% RH

(2) Use Temperature :

- a. Minimum Temperature : -40 deg.C Ambient temperature of this product.
- b. Maximum Temperature : +125 deg.C The value of temperature including ambient and temperature rise of this product.
- c. Reliability test temperature range from -40 ~ +125 deg.C
- d. However, this is not meant as temperature grade guarantee for UL.

(3) Model :

When this product was used in a similar or as new product to the original one, sometimes it might be unable to satisfy the specifications due to difference in condition of usage.

(4) Drop :

If this product suffered mechanical stress such as drop, characteristics may become poor (due to damage on coil / bobbin / ferrite ... etc.)

Never use such stressed product.

Care note for Safety :

(1) Provision to Abnormal Condition :

This product itself does not have any protective function in abnormal condition such as overload, short-circuit and open-circuit conditions, etc.

Therefore, it shall be confirmed from the end product that there is no risk of smoking, fire, dielectric withstand voltage insulation resistance,etc. in abnormal conditions to provide protective devices and /or protection circuit in the end product.

(2) Temperature Rise :

Temperature rise on this product depends on the installation condition on end products.

It shall be confirmed on the actual end product that temperature rise of this product is within the specified temperature class limit.

(3) Dielectric Strength :

Dielectric withstanding test with higher voltage than specific value will damage insulating material and shorten its life.

(4) Water :

This product must not be used in wet condition resulted from water, coffee or any liquid contact because insulation strength becomes very low under such condition.

(5) Potting :




If this product is potted in some compound, coating material of magnet wire might be occasionally damaged. Please ask us if you intend to pot this product.

(6) Detergent :

Please consult our company immediately once under such circumstances because product reliability confirmation etc. is needed when this product come in contact with these chemicals.

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize


Reliability :

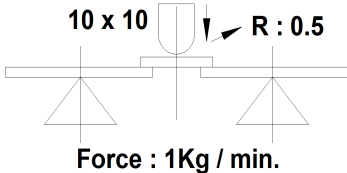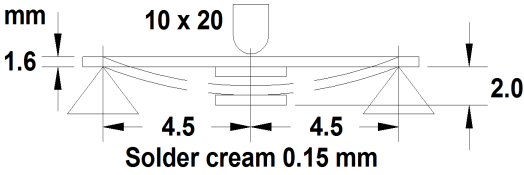SN	Test Item	Test Condition	Specification												
1	Dimension	Actual Size ...	Meet Spec												
2	Thermal Shock (Temperature Cycle)	Temperature : -40 ~ +125 deg.C kept stabilized for 30 min. each Cycle : 100 Cycles (power off)	Elec. no variation Appearance no deformation												
3	Humidity Resistance	Humidity : 90% ~ 95% RH Temperature : 60 ± 2 deg.C , Test Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation												
4	HighTemperature	Temperature : 125 ± 2 deg.C Testing Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation												
5	Low Temperature	Temperature : -40 ± 2 deg.C Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation												
6	Temperature and Humidity Cycle	<table border="1"> <thead> <tr> <th>Temperature</th> <th>Humidity</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>25 deg.C</td> <td>90% ~ 95% RH</td> <td>3.0 Hr</td> </tr> <tr> <td>55 deg.C</td> <td>95% ~ 96% RH</td> <td>5.0 Hr</td> </tr> <tr> <td>25 deg.C</td> <td>90% ~ 95% RH</td> <td>3.0 Hr</td> </tr> </tbody> </table>	Temperature	Humidity	Time	25 deg.C	90% ~ 95% RH	3.0 Hr	55 deg.C	95% ~ 96% RH	5.0 Hr	25 deg.C	90% ~ 95% RH	3.0 Hr	Elec. no variation Appearance no deformation
		Temperature	Humidity	Time											
		25 deg.C	90% ~ 95% RH	3.0 Hr											
		55 deg.C	95% ~ 96% RH	5.0 Hr											
25 deg.C	90% ~ 95% RH	3.0 Hr													
Cycle : 20 Cycles															
7	Vibration	Frequency : 10Hz ~ 55Hz , Amplitude : 1.5 mm Direction : X , Y , Z , Time : 2 Hours each	Elec. no variation Appearance no deformation												
8	Solderability	Go through real SMT IR-Reflow The profile like our suggest profile. Preheat : 160 ± 10 deg.C (90 sec) Peak : 245 ± 5 deg.C Peak Time : 50 Sec. / up 217 deg.C	Elec. no variation Appearance no deformation												
9	Soldering Heat Resistance	Preheat : 160 ± 10 deg.C (90 sec) Solder : Sn / Ag / Cu (Pb Free) Solder Temp. : 260 ± 5 deg.C , Time : 3 ± 1 seconds	Elec. no variation Appearance no deformation												
10	Iron Solder Heat Resistance	Solder Temp. : 350 ± 5 deg.C Flux : Rosin , Time : 3 ± 1 seconds	Elec. no variation Appearance no deformation												
11	Bending Strength	<p>Unit : mm</p>  <p>Force : 1Kg / min.</p>	Elec. no variation Appearance no deformation												
12	Flexure Strength	<p>Unit : mm</p>  <p>Solder cream 0.15 mm</p>	Elec. no variation Appearance no deformation												
13	Terminal Strength	 <p>Mount on PCB Solder Cream 0.15 mm</p> <p>Push 10N force to X , Y direction</p>	Elec. no variation Appearance no deformation												
14	High-Voltage	100 V DC between core & winding	Elec. no variation Appearance no deformation												
15	Load life	Temperature : 25 ± 3 deg.C Load : Allowed DC Current , Test Time : 96 ± 2 Hours	Elec. no variation Appearance no deformation												

Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize


Packaging Information :

Tape Dimension (mm) :

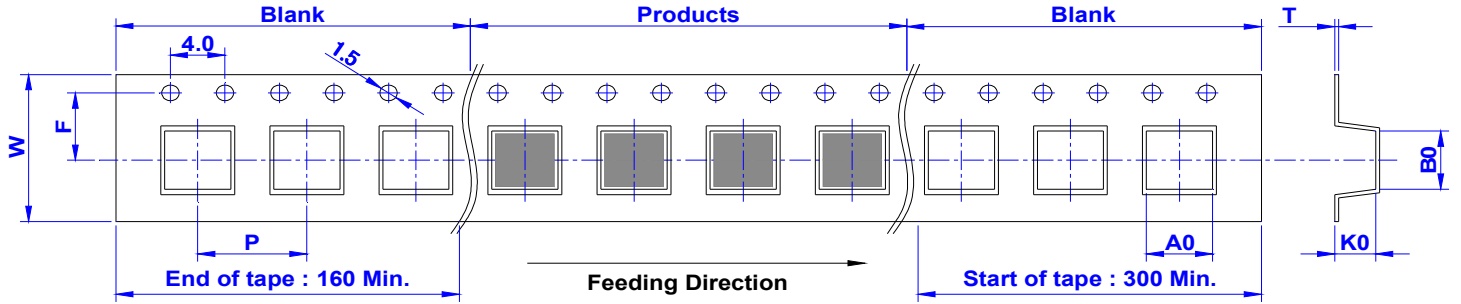


SIZE/mm	W	P	A0	B0	K0	T	F
1608	8.00	4.00	1.10	1.90	0.95	0.23	3.50
2012	8.00	4.00	1.53	2.40	1.23	0.23	3.50
2016	8.00	4.00	1.88	2.40	1.23	0.23	3.50
2520	8.00	4.00	2.20	2.85	1.40	0.23	3.50

Reel Dimension (mm) :

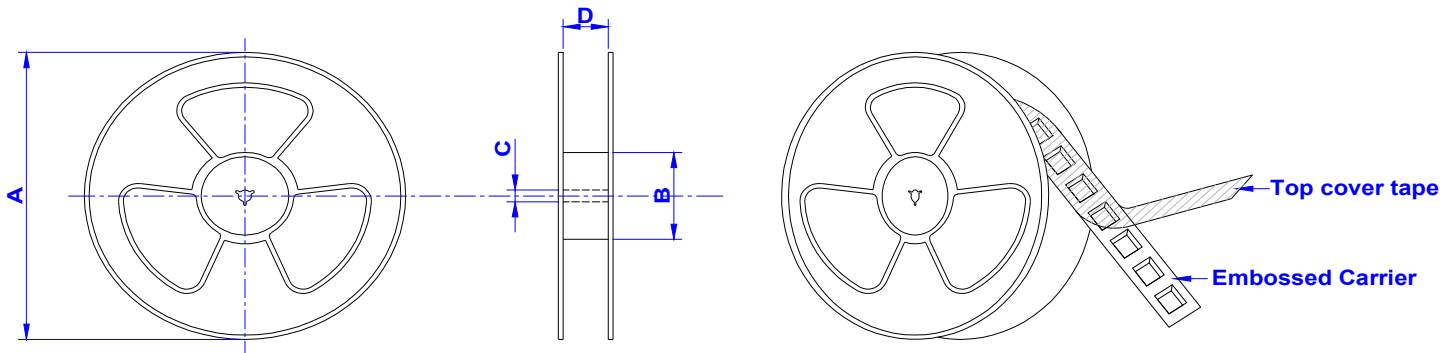

SIZE/mm	Reel Size	A	B	C	D	QTY / Reel
1608	7" x 8 mm	178	60	13	8.5	4000 PCS
2012	7" x 8 mm	178	60	13	8.5	4000 PCS
2016	7" x 8 mm	178	60	13	8.5	3000 PCS
2520	7" x 8 mm	178	60	13	8.5	3000 PCS

Tearing Off Force :

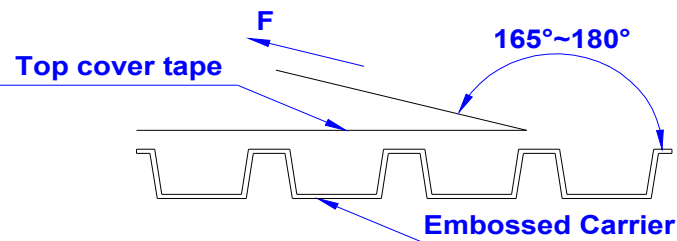


The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions (referenced ANSI / EIA - 481 - D - 2008 of 4.11stadnard).

Room Temp. (deg.C)	Room Humidity (%)	Room Atm. (hPa)	Tearing Speed (mm / min)
5 ~ 35	45 ~ 85	860 ~ 1060	300


Product Series : GBLH	Brand : GOTREND
File Version : GBLH-SERIES-V2R7	Editor : Qiuyi Wu
Established Date : 2011.04.22	Description : High Current Multilayer Ferrite Chip Inductor
Latest Edit Date : 2021.09.27	Product Type : <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Customize

Packaging Information :


Box Package :

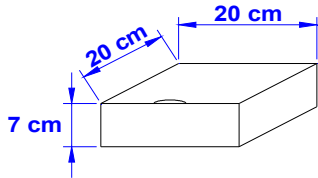

7" Small Box

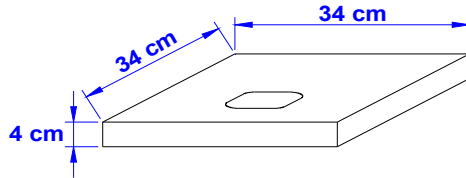

13" Small Box

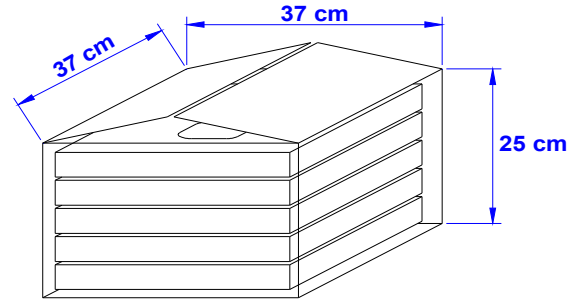

Large Box

SIZE/mm	Reels in Small Box(QTY)	Small Box in Large Box(QTY)
1608	5(20000)	8(160000)
2012	5(20000)	8(160000)
2016	5(15000)	8(120000)
2520	5(15000)	8(120000)